

FILTER SELECTION DATA SHEET

SERVA-cell 65/85/95

Extended surface ASHRAE rated filter


Purolator Filtration Systems

Introduction

- Purolator's SERVA-cell is a high efficiency, extended surface, ASHRAE rated air filter.
- Its box filter construction eliminates the need for retainers and special external wire media supports.
- A high surface area to depth ratio provides the maximum amount of effective filter media in areas of minimum in-line duct space.
- Applications: For conditions such as high humidity, turbulent airflow, intermittent water exposure, and elevated operating temperatures.
- Average efficiency range: 65-95%
Average arrestance: 97-99%
- Recommended airflow rate: 500 FPM (625 FPM Max.)
- Available in seven filter face sizes (see chart on back), and two depth sizes—6", 12".

Media and Support

- Media: Continuous sheet of non-combustible, waterproof, microfiberglass.
- Pleat configuration: Radi-edge configuration promotes maximum exposure of media surface area to airflow.
- Pleat support: Pleated around radi-edge, corrugated aluminum separators. All filter packs to be woven on Purolator's automatic weaving machine.
- Media area/square foot: See Performance data chart on back side.

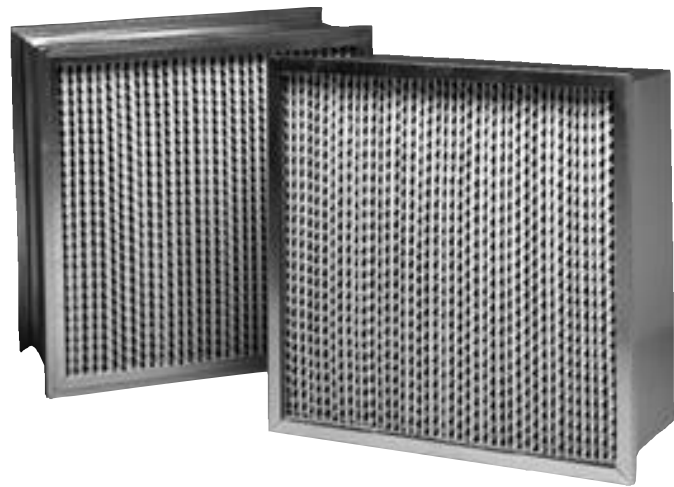

Construction features

- Frame: All metal, corrosion resistant, galvanized steel casing—available with a single or double galvanized steel header.
- The media pack is bonded and secured to the four inner surfaces of the frame with a non-toxic adhesive.
- Available with a single-channel unitized header or double header option. Also available in a full box exact size.
- U.L. Classification: Class 1 approved and listed.
- Tested in accordance with U.L. Standard 900 and ASHRAE 52.1-1992.
- Recommended operating temperature: 200°F.

Purolator
Products Air Filtration Company

Suggested product specifications

1. The filter shall be the SERVA-cell as manufactured by Purolator Products Air Filtration Company.
2. Air filters shall be the rigid-cell air filter type engineered to provide medium and high efficiency filtration combined with a prolonged life cycle.
3. The filter media shall consist of a continuous sheet of non-combustible, waterproof, microfiberglass media pleated around radi-edge, corrugated aluminum separators. These separators shall fully support the media while exposing its maximum surface area to airflow.
4. The radial configuration shall keep the separators from puncturing the media.
5. When tested in accordance with ASHRAE Test Std. 52.1-1992 the filter media shall have an average efficiency of 65-95% and an arrestance of not less than 97-99%.
6. The filter pack shall be enclosed in an all-metal, corrosion-resistant, galvanized steel casing protecting the filter from shipping damage and allowing it to withstand demanding service conditions.
7. The pack shall be bonded to four inner surfaces of the metal frame to secure it firmly in place and prevent air bypass.
8. The enclosure frame shall be constructed of corrosion resistant galvanized steel in such a manner as to produce a rigid durable filter.
9. To eliminate air bypass, each 24 x 24 single header model frame shall be roll formed continuously from the enclosure frame material.
10. Filters shall be listed and rated by Underwriters Laboratories, Inc. as Class I.

Performance data: SERVA-cell 65/85/95

Series	Nominal size W x H x D	Actual Size W x H x D*	SERVA-cell Model number	Rated capacity CFM	Initial resistance inches w.g.	Media area/ Sq. ft.	Filter weight lbs.	
65	24 x 24 x 12	23-5/16 x 23-5/16	SL65-4412	2000	.45	105	18.0	
	20 x 25 x 12	19-5/16 x 24-5/16	SL65-0512	1750	.45	90	17.0	
	20 x 24 x 12	19-5/16 x 23-5/16	SL65-0412	1650	.45	86	16.5	
	20 x 20 x 12	19-5/16 x 19-5/16	SL65-0012	1400	.45	70	13.5	
	16 x 25 x 12	15-5/16 x 24-5/16	SL65-6512	1400	.45	70	13.5	
	16 x 20 x 12	15-5/16 x 19-5/16	SL65-6012	1100	.45	56	11.0	
	12 x 24 x 12	11-5/16 x 23-5/16	SL65-2412	1000	.45	48	20.0	
	24 x 24 x 6	23-5/16 x 23-5/16	SL65-4406	1000	.15	55	11.5	
	20 x 25 x 6	19-5/16 x 24-5/16	SL65-0506	875	.15	47	10.5	
	20 x 24 x 6	19-5/16 x 23-5/16	SL65-0406	825	.15	45	10.0	
	20 x 20 x 6	19-5/16 x 19-5/16	SL65-0006	700	.15	37	8.0	
	16 x 25 x 6	15-5/16 x 24-5/16	SL65-6506	700	.15	37	8.0	
	16 x 20 x 6	15-5/16 x 19-5/16	SL65-6006	550	.15	29	6.5	
	12 x 24 x 6	11-5/16 x 23-5/16	SL65-2406	500	.15	25	13.0	
	85	24 x 24 x 12	23-5/16 x 23-5/16	SL85-4412	2000	.60	105	18.0
		20 x 25 x 12	19-5/16 x 24-5/16	SL85-0512	1750	.60	90	17.0
		20 x 24 x 12	19-5/16 x 23-5/16	SL85-0412	1650	.60	86	16.5
		20 x 20 x 12	19-5/16 x 19-5/16	SL85-0012	1400	.60	70	13.5
16 x 25 x 12		15-5/16 x 24-5/16	SL85-6512	1400	.60	70	13.5	
16 x 20 x 12		15-5/16 x 19-5/16	SL85-6012	1100	.60	56	11.0	
12 x 24 x 12		11-5/16 x 23-5/16	SL85-2412	1000	.60	48	20.0	
24 x 24 x 6		23-5/16 x 23-5/16	SL85-4406	1000	.30	55	11.5	
20 x 25 x 6		19-5/16 x 24-5/16	SL85-0506	875	.30	47	10.5	
20 x 24 x 6		19-5/16 x 23-5/16	SL85-0406	825	.30	45	10.0	
20 x 20 x 6		19-5/16 x 19-5/16	SL85-0006	700	.30	37	8.0	
16 x 25 x 6		15-5/16 x 24-5/16	SL85-6506	700	.30	37	8.0	
16 x 20 x 6		15-5/16 x 19-5/16	SL85-6006	550	.30	29	6.5	
12 x 24 x 6		11-5/16 x 23-5/16	SL85-2406	500	.30	25	13.0	
95		24 x 24 x 12	23-5/16 x 23-5/16	SL95-4412	2000	.65	125	22.0
		20 x 25 x 12	19-5/16 x 24-5/16	SL95-0512	1750	.65	108	20.9
		20 x 24 x 12	19-5/16 x 23-5/16	SL95-0412	1650	.65	103	20.9
		20 x 20 x 12	19-5/16 x 19-5/16	SL95-0012	1400	.65	84	19.8
	16 x 25 x 12	15-5/16 x 24-5/16	SL95-6512	1400	.65	84	19.8	
	16 x 20 x 12	15-5/16 x 19-5/16	SL95-6012	1100	.65	66	17.6	
	12 x 24 x 12	11-5/16 x 23-5/16	SL95-2412	1000	.65	58	20.0	
	24 x 24 x 6	23-5/16 x 23-5/16	SL95-4406	1000	.35	64	12.6	
	20 x 25 x 6	19-5/16 x 24-5/16	SL95-0506	875	.35	55	11.6	
	20 x 24 x 6	19-5/16 x 23-5/16	SL95-0406	825	.35	53	11.6	
	20 x 20 x 6	19-5/16 x 19-5/16	SL95-0006	700	.35	43	11.0	
	16 x 25 x 6	15-5/16 x 24-5/16	SL95-6506	700	.35	43	11.0	
	16 x 20 x 6	15-5/16 x 19-5/16	SL95-6006	550	.35	34	10.5	
	12 x 24 x 6	11-5/16 x 23-5/16	SL95-2406	500	.35	30	13.0	

* Actual Depth Dimension: Nominal depth 12"= Actual depth 11 1/2", Nominal depth 6"= Actual depth 5 7/8"



AIR CLEANING SPECIALISTS, INC.

826 Horan Drive Fenton, Missouri 63026

Tel: 636-349-4400 Fax: 636-349-0556

Toll Free: 1-800-878-5030

E-mail: info@aircleaningspecialists.com

Website: www.aircleaningspecialists.com