


MODEL NUMBER	NOMINAL SIZE (INCHES) WXHXD	ACTUAL SIZE (INCHES) WXHXD	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN. W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
DR95B-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.28	130	15
DR95B-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.28	116	15
DR95B-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.28	112	15
DR95B-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.28	66.5	15
DR65B-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.19	130	11
DR65B-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.19	116	11
DR65B-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.19	112	11
DR65B-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.19	66.5	11

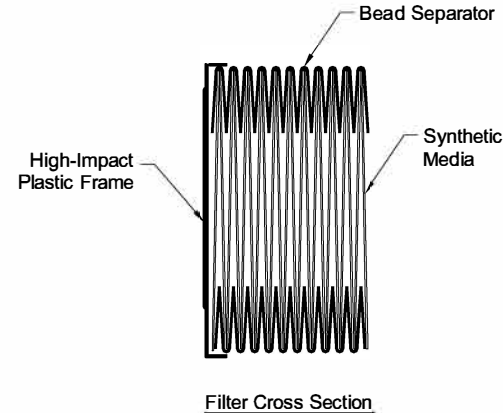

STANDARD CONSTRUCTION

- 100% Synthetic Media
- E-Pleat Technology Pleat Pack
Embossed Media with Adhesive Bead Separators
- High-Impact Poly Styrene Plastic Frame Panels
- Foamed Hot Melt Sealant
- (4) Spring Latch Retainer Slots Air Entering Side
- Gasket Optional

NOTES

- Testing per ASHRAE 52.2-2007
Tested at 492 FPM on 24x24 Face Size
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Maximum Operating Temperature: 170 deg. F (76 deg. C)
- Classified per UL Standard 900 for Flammability
- Special Sizes Not Available.

Air Cleaning Specialists
11088 Gravois Industrial Ct.
St. Louis, MO 63128
(866) 455-2128
purolatorfilters.com

CONTACT FACTORY TO
VERIFY REVISION LEVEL

**TOLERANCES
UNLESS OTHERWISE SPECIFIED**

- FRACTIONAL —
- DECIMAL —
- ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME

12" DOMINATOR BOX STYLE

APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-P-00600	PAGE 1 OF 1
SCALE NONE	DWG. SIZE A	REVISION B
		REVISION DATE 07-20-2012

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.