


MODEL NUMBER	NOMINAL SIZE (INCHES) WxHxD	ACTUAL SIZE (INCHES) WxHxD	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN.W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
DR95-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.34	101.5	15
DR95-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.34	83.0	15
DR95-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.34	67.7	15
DR95-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.34	46.1	15
DR65-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.26	101.5	11
DR65-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.26	83.0	11
DR65-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.26	67.7	11
DR65-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.26	46.1	11

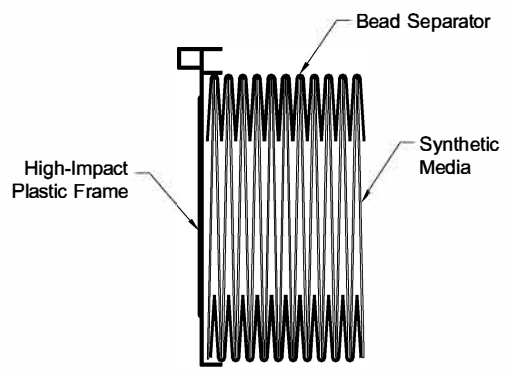

Filter Cross Section

**STANDARD CONSTRUCTION**

- 100% Synthetic Media
- E-Pleat Technology Pleat Pack Embossed Media with Adhesive Bead Separators
- High-Impact Plastic Panels
- Foamed Hot Melt Sealant
- Reverse Air Flow Option Available See MKT-P-00542
- Gasket Optional

**NOTES**

- Testing per ASHRAE 52.1-2007  
Tested at 492 FPM on 24x24 Face Size
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Maximum Operating Temperature: 170 deg. F (76 deg. C)
- Classified per UL Standard 900 for Flammability
- Special Sizes Not Available.

Air Cleaning Specialists  
11088 Gravois Industrial Ct.  
St. Louis, MO 63128  
(866) 455-2128  
purolatorfilters.com

CONTACT FACTORY TO  
VERIFY REVISION LEVEL

**TOLERANCES UNLESS OTHERWISE SPECIFIED**

- FRACTIONAL -
- DECIMAL -
- ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME <b>12" DOMINATOR SINGLE HEADER</b>			
APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-P-00528	PAGE 1 OF 1	
SCALE NONE	DWG. SIZE A	REVISION D	REVISION DATE 07-20-12

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.