


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)	Media Area (Square Feet)
HE-M10-SC-102002	10 X 20 X 2	9-1/2 X 19-1/2 X 1-3/4	700	0.29	4.1
HE-M10-SC-121202	12 X 12 X 2	11-3/4 X 11-3/4 X 1-3/4	500	0.29	3.1
HE-M10-SC-122002	12 X 20 X 2	11-1/2 X 19-1/2 X 1-3/4	840	0.29	5.1
HE-M10-SC-122402	12 X 24 X 2	11-3/8 X 23-3/8 X 1-3/4	1000	0.29	6.1
HE-M10-SC-142002	14 X 20 X 2	13-1/2 X 19-1/2 X 1-3/4	980	0.29	5.6
HE-M10-SC-142502	14 X 25 X 2	13-1/2 X 24-1/2 X 1-3/4	1220	0.29	7.1
HE-M10-SC-152002	15 X 20 X 2	14-1/2 X 19-1/2 X 1-3/4	1050	0.29	6.2
HE-M10-SC-161602	16 X 16 X 2	15-3/4 X 15-3/4 X 1-3/4	890	0.29	6.7
HE-M10-SC-162002	16 X 20 X 2	15-1/2 X 19-1/2 X 1-3/4	1120	0.29	6.7
HE-M10-SC-162402	16 X 24 X 2	15-3/8 X 23-3/8 X 1-3/4	1340	0.29	8.0
HE-M10-SC-162502	16 X 25 X 2	15-1/2 X 24-1/2 X 1-3/4	1400	0.29	8.3
HE-M10-SC-181802	18 X 18 X 2	17-3/4 X 17-3/4 X 1-3/4	1125	0.29	7.0
HE-M10-SC-182002	18 X 20 X 2	17-1/2 X 19-1/2 X 1-3/4	1250	0.29	7.7
HE-M10-SC-182202	18 X 22 X 2	17-1/2 X 21-1/2 X 1-3/4	1375	0.29	9.2
HE-M10-SC-182402	18 X 24 X 2	17-3/8 X 23-3/8 X 1-3/4	1500	0.29	9.2
HE-M10-SC-182502	18 X 25 X 2	17-1/2 X 24-1/2 X 1-3/4	1570	0.29	9.6
HE-M10-SC-202002	20 X 20 X 2	19-1/2 X 19-1/2 X 1-3/4	1400	0.29	8.2
HE-M10-SC-202402	20 X 24 X 2	19-3/8 X 23-3/8 X 1-3/4	1670	0.29	9.8
HE-M10-SC-202502	20 X 25 X 2	19-1/2 X 24-1/2 X 1-3/4	1750	0.29	10.3
HE-M10-SC-242402	24 X 24 X 2	23-3/8 X 23-3/8 X 1-3/4	2000	0.29	11.6
HE-M10-SC-252502	25 X 25 X 2	24-1/2 X 24-1/2 X 1-3/4	2170	0.29	12.8
HE-M10-SC-301602	30 X 16 X 2	29-3/4 X 15-3/4 X 1-3/4	1660	0.29	10.3
HE-M10-SC-302002	30 X 20 X 2	29-1/2 X 19-1/2 X 1-3/4	2085	0.29	12.8
HE-M10-SC-352002	35 X 20 X 2	34-1/2 X 19-1/2 X 1-3/4	2430	0.29	14.8

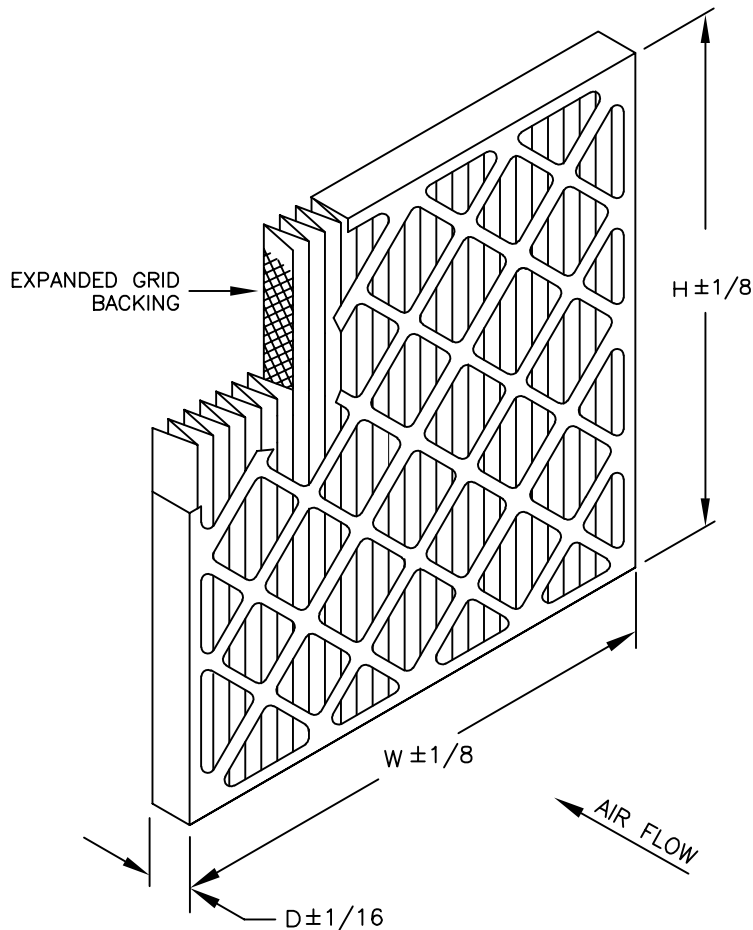

STANDARD CONSTRUCTION

- 100% Synthetic Thermally Bonded White Media
- 10.0 Pleats Per Foot
- Expanded Metal Pleat Supports
- Moisture Resistant Beverage Board Frame
- Double Wall Frame

NOTES

- MERV 10 per ASHRAE 52.2-2017 ePM₁₀ 60% PER ISO 16890
Tested at 492 FPM on 24x24x1 filter size
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified Per UL Standard 900 for Flammability
- Maximum Operating Temperature: 225 deg. F

ACS
Air Cleaning Specialists, Inc.

TOLERANCES UNLESS OTHERWISE SPECIFIED	
FRACTIONAL	-
DECIMAL	-
ANGLES	-
ALL DIMENSIONS IN INCHES	

DRAWING NAME HI-E MERV 10 STANDARD CAPACITY 2"			
APPROVED BY <i>K. O...</i>		SPECIFICATION NO. MKT-B-00788	
SCALE NONE		REVISION DATE 11.08.22	
DWG. SIZE A		REVISION NEW	
THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS. ALL RIGHTS RESERVED.			