


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)	Media Area (Square Feet)
HE-M10-SC-122404	12 X 24 X 4	11-3/8 X 23-3/8 X 3-3/4	1000	0.23	11.2
HE-M10-SC-162004	16 X 20 X 4	15-1/2 X 19-1/2 X 3-3/4	1120	0.23	12.5
HE-M10-SC-162504	16 X 25 X 4	15-1/2 X 24-1/4 X 3-3/4	1400	0.23	15.6
HE-M10-SC-182404	18 X 24 X 4	17-3/8 X 23-3/8 X 3-3/4	1500	0.23	16.2
HE-M10-SC-202004	20 X 20 X 4	19-1/2 X 19-1/2 X 3-3/4	1400	0.23	15.6
HE-M10-SC-202404	20 X 24 X 4	19-3/8 X 23-3/8 X 3-3/4	1670	0.23	18.7
HE-M10-SC-202504	20 X 25 X 4	19-1/2 X 24-1/2 X 3-3/4	1750	0.23	19.6
HE-M10-SC-242404	24 X 24 X 4	23-3/8 X 23-3/8 X 3-3/4	2000	0.23	22.4
HE-M10-SC-292504	29 X 25 X 4	28-1/2 X 24-1/2 X 3-3/4	2430	0.23	26.1
HE-M10-SC-302804	30 X 28 X 4	29-1/2 X 27-1/2 X 3-3/4	2920	0.23	31.1

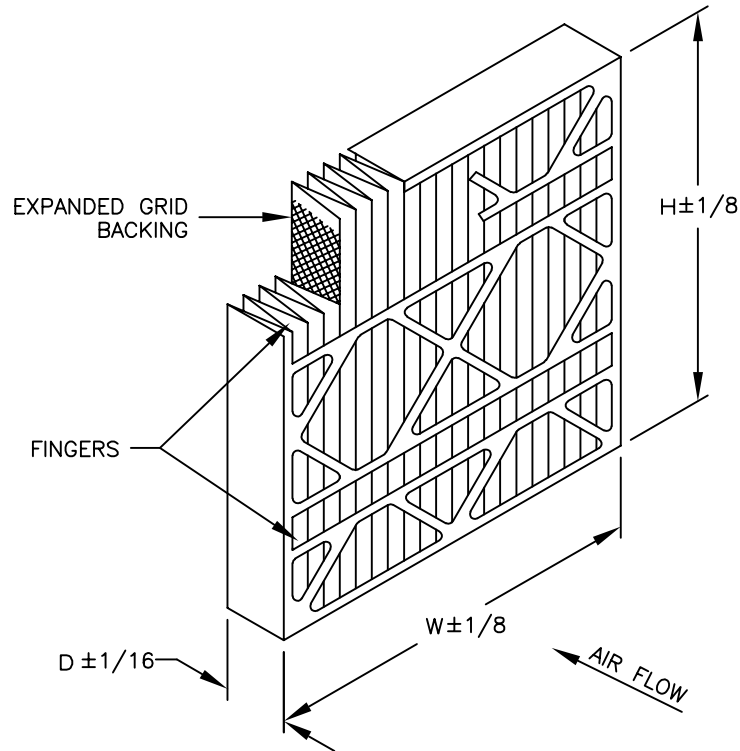

STANDARD CONSTRUCTION

- 100% Synthetic Thermally Bonded White Media
- 9.0 Pleats Per Foot
- Expanded Metal Pleat Supports
- Moisture Resistant Beverage Board Frame
- Double Wall Frame

NOTES

- MERV 10 per ASHRAE 52.2-2017 ePM₁₀ 60% PER ISO 16890
Tested at 492 FPM on 24x24x1 filter size
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified Per UL Standard 900 for Flammability
- Maximum Operating Temperature: 225 deg. F

	TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWING NAME HI-E MERV 10 STANDARD CAPACITY 4"		
	FRACTIONAL	-	APPROVED BY <i>K. O'Connell</i>	SPECIFICATION NO. MKT-B-00789	PAGE 1 OF 1
	DECIMAL	-	SCALE NONE	DWG. SIZE A	REVISION NEW
	ANGLES	-	REVISION DATE 11.08.22		
ALL DIMENSIONS IN INCHES			THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS. ALL RIGHTS RESERVED.		