



Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G)		Media Area (Square Feet)
				90-95%	60-65%	
SL**GT	24 x 24 x12	23-3/8 x 23-3/8 x 11-1/2	2000	.70	.45	114
SL**GT	24 x 12 x12	23-3/8 x 11-3/8 x 11-1/2	1000	.70	.45	57
SL**GT-XL	24 x 24 x12	23-3/8 x 23-3/8 x 11-1/2	2500	.95	.72	152
SL**GT-XL	24 x 12 x12	23-3/8 x 11-3/8 x 11-1/2	1250	.95	.72	76

** Insert efficiency code to complete model (95 = 90-95%, 65 = 60-65%)
Example: SL95GT 24x24x12 is 90-95%, size 24x24x12

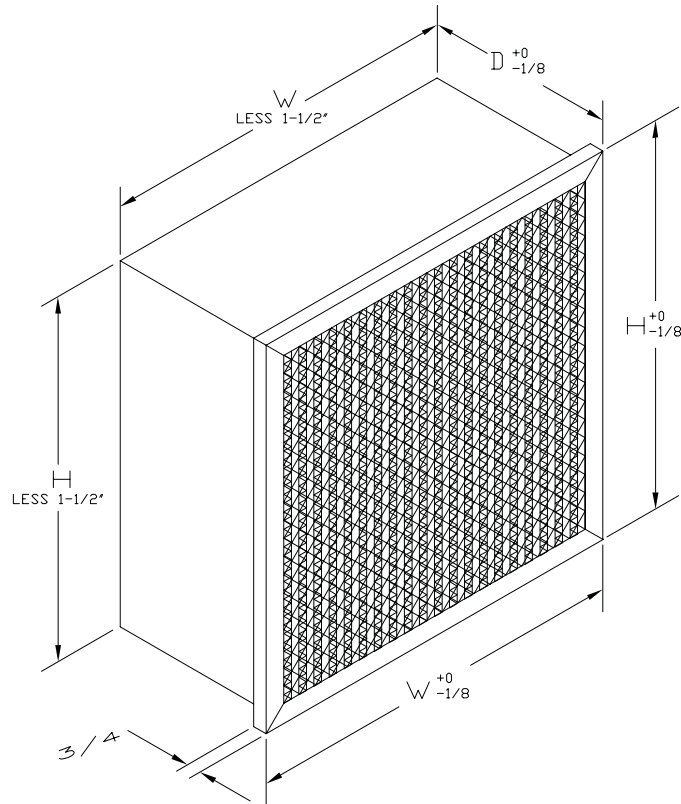

24 GA Galvanized Steel Frame
13/16 Single Header

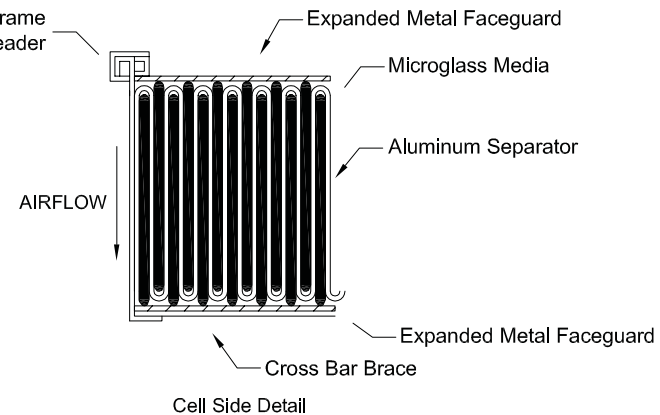

STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Corrugated Aluminum Separators With Rolled Edges
3. High Loft Microglass Wrap Around Media Pack
4. 24 Gauge Galvanized Steel Cell Sides
5. Header Air-Entering Side: Single Piece U-Channel
6. Expanded Metal Grid Both Sides
Cross-Bar Brace on Air-Laving Side
7. Neoprene Gasket on Air-Leaving Side

NOTES

1. Final Resistance: 2.5" W.G.
2. Rated Velocity 12" Depth Series - 500 FPM
Rated Velocity 6" Depth Series - 250 FPM
3. Burst Strength - 25" W.G.
4. Class 1 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 350 deg. F
6. Optional Upstream Gasket Available (Ex: SL95GT 24x24x12 U)



100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-925-2247
F: 502-961-0930
www.purolatorair.com

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL -
DECIMAL -
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

SERVA CELL GT

APPROVED BY

K. Quinn

SPECIFICATION NO.

MKT-P-00223

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

NEW



REVISION DATE

05-21-08

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.

MODEL NUMBER	NOMINAL SIZE (INCHES) W X H X D	ACTUAL SIZE (INCHES) W X H X D	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN W.G.) 90-95%	INITIAL RESISTANCE (IN W.G.) 60-65%	MEDIA AREA (SQUARE FEET)
SL**GTD	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	.70	.45	114
SL**GTD	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1000	.70	.45	57
SL**GTD	24 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	1000	.70	.45	53
SL**GTD	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	500	.70	.45	26
SL**GTD-XL	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2500	.95	.72	152
SL**GTD-XL	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1250	.95	.72	76
SL**GTD-XL	24 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	1250	.95	.72	70
SL**GTD-XL	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	635	.95	.72	53

** - Filter Efficiency (95 = 90-95%, 65 = 60-65%)

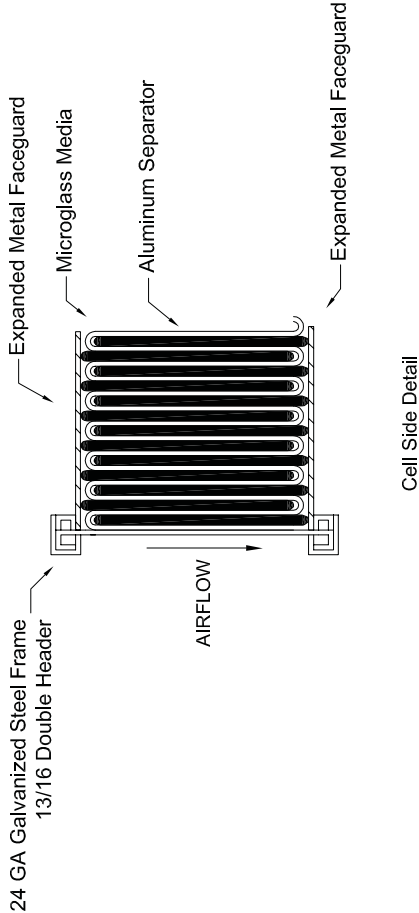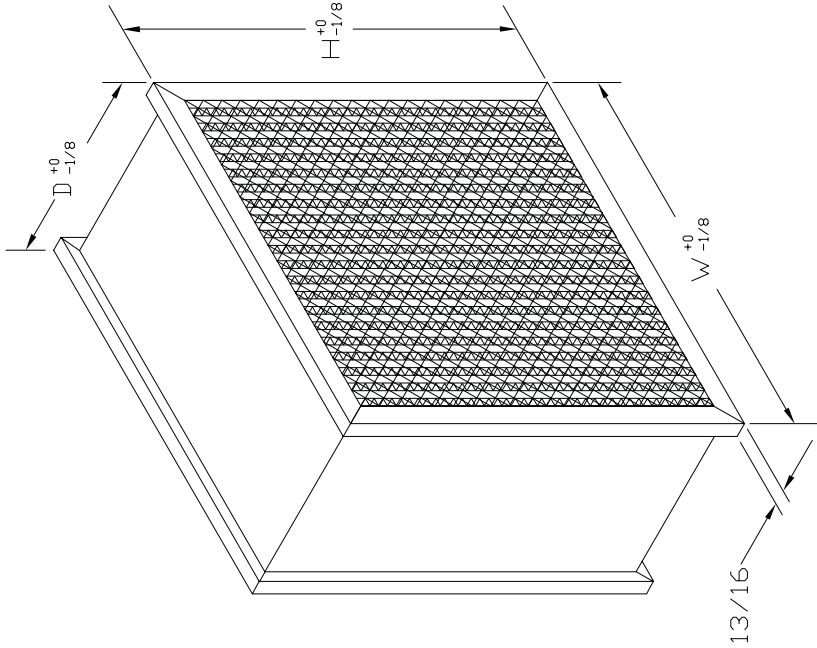

STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Corrugated Aluminum Separators With Rolled Edges
3. High Loft Microglass Wrap Around Media Pack
4. 24 Gauge Galvanized Steel Cell Sides
5. Header on Both Sides; Single Piece U-Channel
6. Expanded Metal Grid Both Sides
7. Caulking on Top and Bottom of Media Pack on Air Entering Side
8. Neoprene Gasket on Air-Leaving Side

NOTES

1. Final Resistance: 2.5" W.G.
2. Rated Velocity 12" D Series - 500 FPM
Rated Velocity 6" D Series - 250 FPM
3. Burst Strength - 25" W.G.
4. Class 1 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 350 deg. F

Purolator 100 River Ridge Circle Jeffersonton, IN 47130 P: 866-925-2247 F: 502-961-0930 www.purolatorair.com		DRAWING NAME SERVA CELL GT DOUBLE HEADER	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVED BY <i>K. Quinn</i> SPECIFICATION NO. MKT-P-00222	
FRACTIONAL - DECIMAL - ANGLES -		SCALE NONE DWG. SIZE A REVISION 1/04/2010	PAGE 1 OF 1 REVISION DATE
CONTACT FACTORY TO VERIFY REVISION LEVEL		CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY G.L.C. AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.	