


MODEL NUMBER	NOMINAL SIZE (INCHES) H X W X D	ACTUAL SIZE (INCHES) H X W X D	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN. W.G.)	MEDIA AREA (SQUARE FEET)
SLVA95GT	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2500	0.65	194
SLVA95GT	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1250	0.65	97
SLVA65GT	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2500	0.48	194
SLVA65GT	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1250	0.48	97

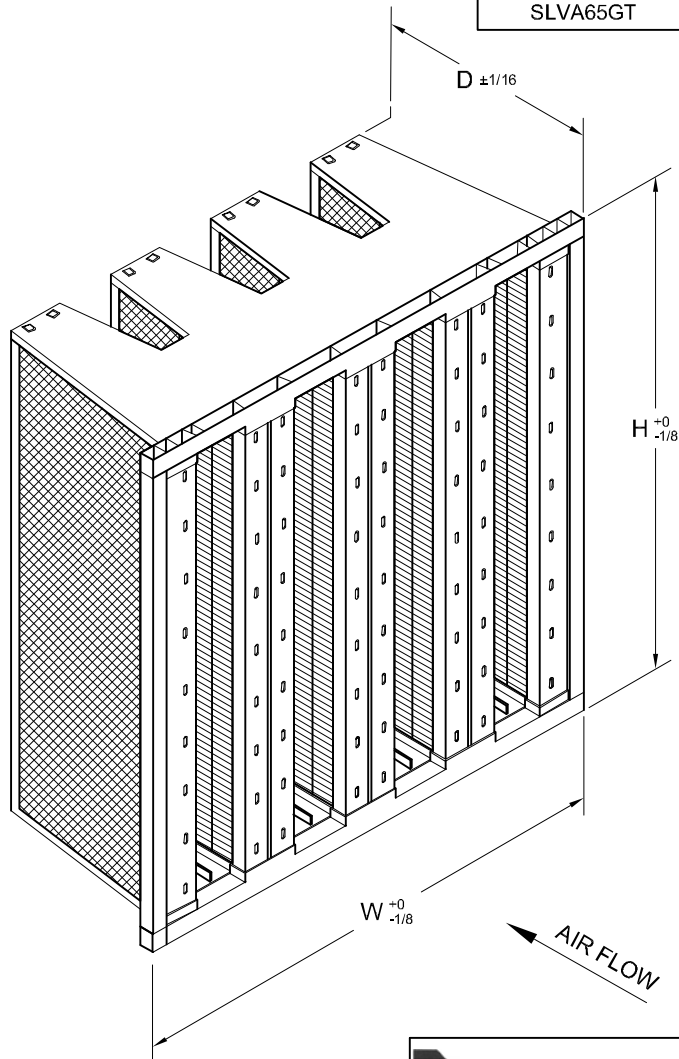

STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Mini-Pleat Bead Separator Packs
3. Rigid Plastic End Plates
4. Galvanized Steel Support Struts
5. Urethane Sealant In Vertical Struts
6. Expanded Metal Faceguards On Air Leaving Side

NOTES

1. Performance per ASHRAE Standard 52.2-2007
Tested at 492 FPM on 24x24x12 Face Size
2. Recommended Final Resistance: 2.5" W.G.
3. Burst Strength: 25" W.G.
4. Rated Velocity 12" Deep - 625 FPM
5. Classified per UL Standard 900 for Flammability
6. Maximum Operating Temperature: 180 deg. F
7. Optional Gasket Available, 1/4 x 3/4 Dovetail Neoprene
D - Air Leaving Side (Ex. SLVA95GT 24x24x12 D)



100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-925-2247
F: 502-961-0930
www.purolatorair.com

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL —
DECIMAL —
ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME

SERVA-CELL VA-GT

APPROVED BY

K. Quinn

SPECIFICATION NO.

MKT-P-00181

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

B

REVISION DATE

08-21-12

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.