



Product Bulletin

Subject: Fiberglass Automatic Roll Filter Medias
For use in Automatic Roll Filter Equipment


Applications

Purolator fiberglass automatic roll filter medias are designed for use in automatic, self-renewing air filter machines. The media is wound on a core designed to fit into the supply section of all major brands of equipment including:

Purolator	Carrier
Air Maze	Commercial
AAF	Continental
BLC	Farr
Cambridge	Trane

Construction

The media is made from continuous filament glass fibers formed into a high loft mat (2 1/2" thick) for low resistance and high dust holding capacity.

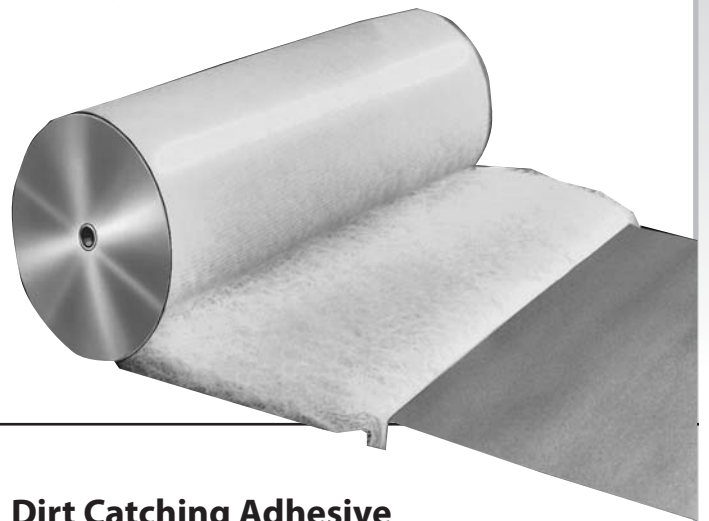

High Compression Strength

A thermo-bonded resin applied during the spinning process forms a strong bond at each fiber intersection to provide high compression strength. As resistance increases, high compression strength enables the media to maintain its full thickness and prevent collapsing. Compression strength also enables the media to spring back to its full thickness as it unwinds off the roll.

Progressive Density Media Construction

The media is spun with a more open fiber pattern on the air entering side and a denser pattern on the air leaving side. This progressive density fiber arrangement allows dirt particles to penetrate deeper into the media. Utilizing the full depth of the media prevents face loading and increases dust holding capacity.

Dirt Catching Adhesive

Purolator medias are coated with an adhesive to catch and hold dirt particles. Types CF and YTS have an oil base adhesive that saturates dirt particles and prevents them from breaking away from the fibers. Type SHP utilizes a gel type adhesive that has higher viscosity providing superior dirt holding characteristics.

High Tensile Strength

A synthetic mesh netting on the air leaving side of the media provides the strength to maintain full roll width as the roll advances. Insufficient tensile strength allows the media to "neck", causing it to pull out of the side channels creating bypass.

Product Bulletin

Fiber Glass Automatic Roll Filter Medias (For Use in Automatic Roll Filter Equipment)

Application Guide		
Type CF	Type YTS	Type SHP
Commercial Grade	Industrial Grade	Supreme Grade
Light Dirt Loading Conditions	Moderate to Heavy Dirt Loading Conditions	Heavy Dirt Loading Conditions

Construction/ Performance			
	Type CF	Type YTS	Type SHP
Size			
Roll Length	65'	65'	65'
Roll Width	①	①	①
Media Thickness	2 1/2"	2 1/2"	2 1/2"
Color	Blue	Yellow	Green
Adhesive	Oil	Oil	Oil
Performance			
Initial Resistance	.16"	.18"	.24"
(In. W.G. @ 500 FPM)			
Recommended Upper	.50"	.50"	.50"
Operating Resistance			
(In. W.G.)			
Arrestance	70 - 75%	80 - 85%	85 - 90%
Operating Temperature Limits	175° F	175° F	175° F

All performance data is based on ASHRAE Standard 52.1-1992.

①Rolls are sized to fit on the cores of all major brands of auto roll equipment.

Underwriters Laboratories, Inc. Classification

Types CF, YTS and SHP automatic roll filter medias are Classified U.L. Class 2. Testing was performed according to U.L. Standard 900.

P-PBAUTO-FG-1108



www.purolatorair.com



Distributed by:

Air Cleaning Specialists
 11088 Gravois Industrial Court
 St. Louis, MO 63128
 (866) 455-2128
 purolatorfilters.com

© 2008 CLARCOR Air Filtration Products.
 CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.purolatorair.com